

Sanicom 2

Grey water

Sanicom 2 is an automatic grey water lifting station with two powerful motors that can be used in busy commercial applications such as restaurants, pubs, hair salons, cafes etc. as the second motor acts as a failsafe backup. Suitable for multiple connections this unit can handle temperatures up to 90°C for short periods of time (max 5 mins). The second pump assists the first in case of a sudden large intake of water. The tank is equipped with 2 immersion tubes controlling the motor and the alarm system.



PERFORMANCE

• Max. head : 12 m

• Max. flow rate : 18 m³/h

PRODUCT BENEFITS

- Grey water lifting station
- Floor standing for easy installation
- Easily accessible for maintenance
- 2 side inlets with outer diameter 40/50/80
- 2 pumps operate alternately for more even use
- Remote control box comes as standard
- Alarm can be fitted if required





DELIVERED AS STANDARD



Classic control Box

PACK CONTAINS

Sanicom 2, 2 non-return valve, connectors, control unit (2 m cable)

OPTIONAL EXTRAS




Wired, audible and visual alarm box Product code: 30521 Barcode: 3308815084107



Sanicubic carbon filter Product code: 1108 Barcode: 3308815077529




DIMENSIONS

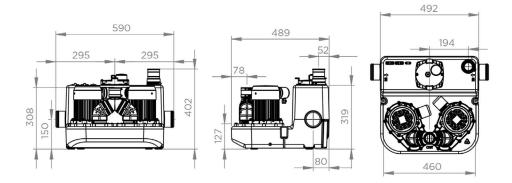

CURVE

H (m) 18 16 14 12 10 8 6 4 2 0 0 3 6 9 12 15 18 21 24 27 flow rate (m³/h)

CONNECTIONS



External inlet diameter : 40/50/80 mm

Discharge diameter ext. : 50 mm

Ext. ventilation diameter : 50 mm

| | Sanicom 2 |
|---|---------------|
| Type of control box | Classic |
| Material | |
| Tank | PE |
| Pump housing | PA 12 GF |
| Motor housing | Aluminium |
| Impeller | PA 6 GF |
| Electrical features | |
| Voltage (V) | 230 |
| Frequency (Hz) | 50-60 |
| Power consumption P1 (W) | 1500 |
| Power output P2 (W) | 1050 |
| IP rating | IPX4 |
| Hydraulics | |
| Max. head (m) | 12 |
| Max. flow rate (m³/h) | 18 |
| External inlet diameter (mm) | 40/50/80 |
| Discharge diameter ext. (mm) | 50 |
| Ext. ventilation diameter (mm) | 50 |
| Total volume (L) | 34 |
| Useable volume (L) | 13 |
| ON level /OFF level (mm) | 145/60 |
| Alarm level (mm) | 215 |
| Particle size (mm) | 8 |
| Max. temperature of the pumped liquid (5 min) | 90°C |
| Type of impeller | multi-channel |
| Type of activation | pneumatic |
| Identification and logistics | |
| Gross weight (kg) | 25 |
| EAN code | 3308815082868 |
| Product code | 30004 |